


The asphalt filler and bonder that will not separate from bituminous surfaces. Repairs blacktop and concrete. Resists wear, corrosives, weather, impact. Waterproofing membrane for bridges and concrete overlays. Bonds expansion joints and bridge footings. Tensile elongation 35% minimum. One application lasts for years.

True-Bond^{ct}

EXCELLENT FOR EXPANSION JOINTS & ROOF REPAIR!
FOR USE ON ASPHALT, CONCRETE, TILE, METAL OR WOOD!
100% SOLIDS, COAL TAR MODIFIED EPOXY BASED COMPOUND

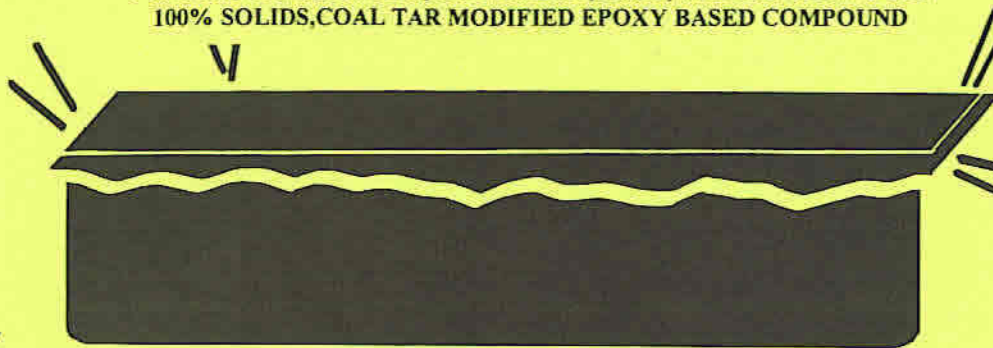

EXCLUSIVE
Another quality
product from



R. C. Davis Co. Inc.

Manufacturing Chemists For American Commerce and Industry

1600 OLD COUNTRY RD.
PLAINVIEW, N.Y. 11803

ADDITIONAL INFORMATION
AND RE-ORDERS

(516) 694-2080

the permanent
asphaltic patch . . .
for holes, pits
and cracks

ACCEPTED BY USDA

Directions

Clean surface of loose aggregates, dirt, grease and oil, and dust. For best results, etch surface with 10 to 15% muriatic acid, flush with clean water, and allow to dry. Combine all of container 'A' with container 'B' and mix thoroughly. Add 3 to 5 parts of dry sand and mix in thoroughly. Brush or trowel on as thick as needed to repair area. Pot life approximately 20 minutes. Because of its high early strength, TRUE-BOND CT may be opened to traffic in six hours.

Small Quantity Mixing

- 1 cup of Part 'A'
- 1 cup of Part 'B'
- Stir *thoroughly* for 1 minute
- Add 6 cups of dry sand (you may use more or less sand to customize the mix for your application!)
- Mix *thoroughly* again

Coverage: Approximately 200 sq. ft. at approximately 1/4" thickness.

Caution

TRUE-BOND CT contains an alkaline amine. Avoid contact with skin or eyes. In case of contact, wash skin with soap and water. Flush eyes immediately with water and see doctor. If TRUE-BOND CT is used indoors, provide adequate ventilation.