

The concrete filler and bond that will not separate from concrete. Resurfaces chipped and pitted concrete. Resists wear, corrosives, weather, impact. Bonds cracked curbing, masonry, swimming pools. Waterproofs. One application lasts for many years. Low temperature cure (as low as 40°F).


# True-Bond Gel

ACCEPTED BY USDA

## Directions

Clean surface of loose aggregates, dirt, grease and oil, and dust. For best results, etch surface with 10 to 15% muriatic acid, flush with clean water, and allow to dry. Combine all of container 'A' with container 'B' and mix thoroughly. Add 1 to 5 parts of dry sand and mix in thoroughly. Trowel on as thick as needed to repair area. Pot life approximately 20 minutes. Because of its high early strength, TRUE-BOND GEL may be opened to traffic in six hours.

FORMULATED FOR VERTICAL APPLICATION!  
FOR USE ON CONCRETE, TILE, METAL OR WOOD!  
100% SOLIDS, EPOXY BASED COMPOUND

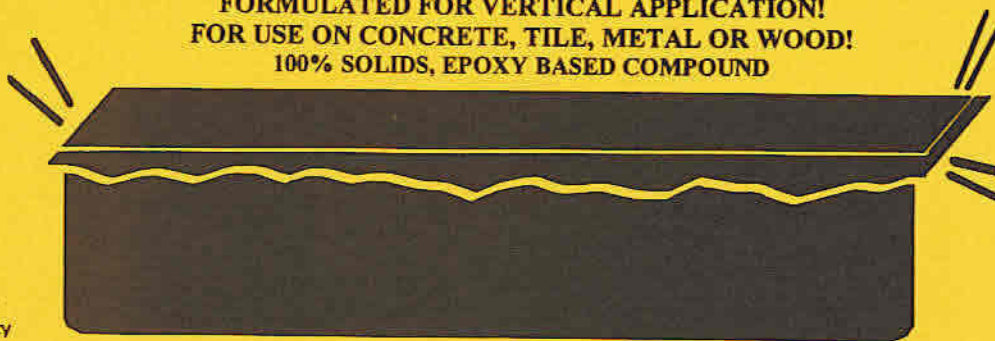

EXCLUSIVE  
Another quality  
product from



*R. C. Davis Co. Inc.*

Manufacturing Chemists For American Commerce and Industry

1600 OLD COUNTRY RD.  
PLAINVIEW, N.Y. 11803

FOR ADDITIONAL INFORMATION  
AND RE-ORDERS

(516) 694-2080

the permanent  
concrete patch . . .  
for holes, pits  
and cracks

## Small Quantity Mixing

- 1 cup of Part 'A'
- 1 cup of Part 'B'
- Stir *thoroughly* for 1 minute
- Add 2 cups of dry sand (you may use more or less sand to customize the mix for your application!)
- Mix *thoroughly* again

Coverage: Approximately 200 sq. ft. at approximately 1/4" thickness.

## Caution

TRUE-BOND Gel contains an alkaline amine. Avoid contact with skin or eyes. In case of contact, wash skin with soap and water. Flush eyes immediately with water and see doctor. If TRUE-BOND GEL is used indoors, provide adequate ventilation.