


The coating that will not separate from concrete. True-Bond 'Kote' is utilized for heavy impact, chemically resistant, industrial and commercial flooring. Resists chipping, corrosives, weather, bacteria, and impact. Waterproofs. Low temperature cure (as low as 40°F). One application lasts many years!

# True-Bond Kote

FOR USE ON CONCRETE, TILE, METAL OR WOOD!  
100% SOLIDS, EPOXY BASED COMPOUND

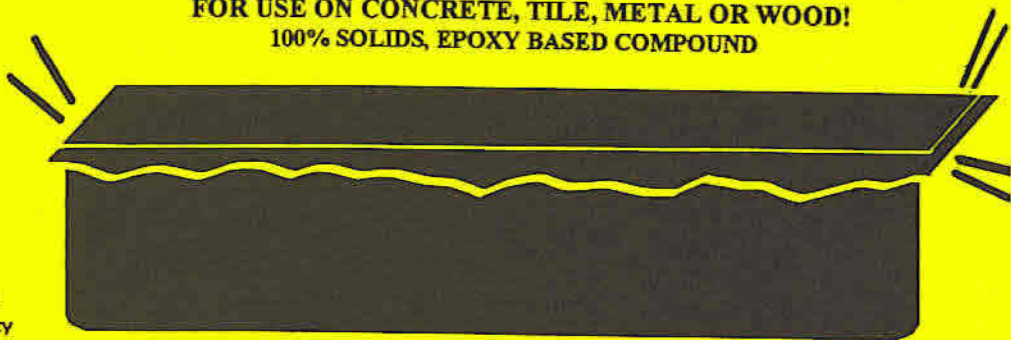

EXCLUSIVE  
Another quality  
product from



*R. C. Davis Co. Inc.*

Manufacturing Chemists For American Commerce and Industry

1600 OLD COUNTRY RD.  
PLAINVIEW, N.Y. 11803

FOR ADDITIONAL INFORMATION  
AND RE-ORDERS  
(516) 694-2080

for permanent,  
heavy duty  
concrete coating,  
sealing or  
slip-proofing

ACCEPTED BY USDA

## Directions

Clean surface of loose aggregates, dirt, grease, oil and dust. For best results, etch surface with 10 to 15% muriatic acid and flush with clean water. Allow surface to dry. Pour all of container 'B' into container 'A'. Hand mix thoroughly. Apply with short nap roller, brush or squeegee in a thin, even coat. Pot life approximately 20 minutes. Because of its high early strength, True-Bond 'Kote' may be opened to traffic in six hours.

### Slip-Proof Application

For non-slip finish, broadcast dry sand, aluminum oxide, or carborundum immediately after application (while True-Bond is still wet). When material is dry, sweep off excess aggregate and apply optional second coat (with or without aggregate).

Coverage: Approximately 300 sq. ft. per kit.

### Small quantity mixing

- 2 cups of Part "A"
- 1 cup of Part "B"
- Stir thoroughly

## Caution

TRUE-BOND contains an alkaline amine. Avoid contact with skin or eyes. In case of contact, wash skin with soap and water. Flush eyes immediately with water and see doctor. If used indoors, provide adequate ventilation.