

ACCEPTED BY USDA

Directions

Clean surface of loose aggregates, dirt, grease and oil, and dust. For best results, etch surface with 10 to 15% muriatic acid and flush with clean water. Pour all of container 'B' into container 'A' and mix thoroughly. Add 3 to 5 parts of dry sand and mix in thoroughly. Brush or trowel on as thick as needed to repair area. Pot life approximately 20 minutes. Because of its high early strength, TRUE-BOND PS may be opened to traffic in six hours.

Small Quantity Mixing

- 2 cups of Part 'A'
- 1 cup of Part 'B'
- Stir *thoroughly* for 1 minute
- Add 9 cups of dry sand (you may use more or less sand to customize the mix for your application!)
- Mix *thoroughly* again


Coverage: Approximately 200 sq. ft. at approximately 1/4" thickness.

Caution

TRUE-BOND PS contains an alkaline amine. Avoid contact with skin or eyes. In case of contact, wash skin with soap and water. Flush eyes immediately with water and see doctor. If TRUE-BOND PS is used indoors, provide adequate ventilation.

True-Bond PS

CAN BE APPLIED TO DAMP CONCRETE!
FOR USE ON CONCRETE, TILE, METAL OR WOOD!
100% SOLIDS, EPOXY BASED COMPOUND

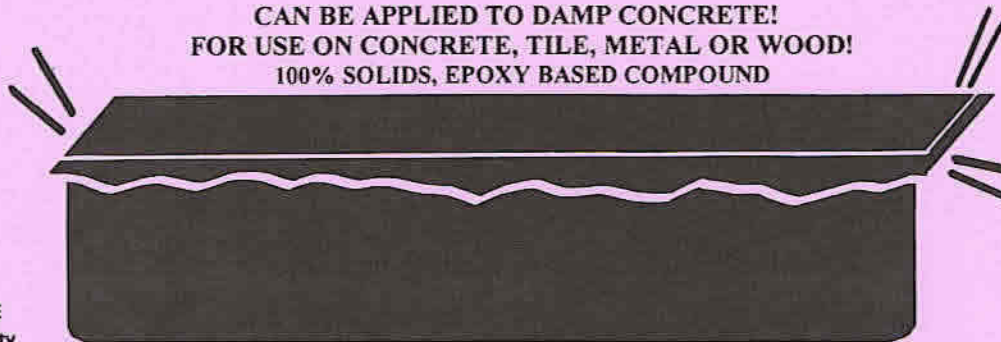

EXCLUSIVE
Another quality
product from



R. C. Davis Co. Inc.

Manufacturing Chemists For American Commerce and Industry

1600 OLD COUNTRY RD.
PLAINVIEW, N.Y. 11803

FOR ADDITIONAL INFORMATION
AND RE-ORDERS

(516) 694-2080

the permanent
concrete patch . . .
for holes, pits
and cracks